


Wire Shelving Specifications

Summary of Key Components


Mounting Systems

Adjustable ShelfTrack™ Hardware System



- A** Hang Track
- B** Standard
- C** Bracket
- D** Shelving

Fixed Mount Hardware System

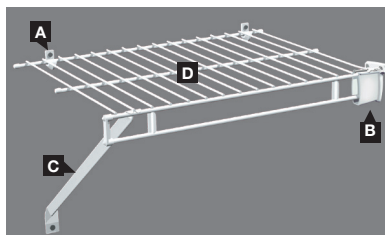

- A** Wall Clip
- B** Side Wall Bracket
- C** Support Bracket
- D** Shelving




Hang Track
Use to hang standards. Creates one step leveling and eliminates the need to install each standard separately which reduces installation time. Available in 40 in. and 80 in. lengths.




Toggle Bolts
Use for drywall installations.



Screws & Anchors
Use for concrete and masonry installations.




Pre-Loaded Wall Clip
Attaches to the back of shelving to anchor shelf to the wall. Use one wall clip every 12 in. and one at each end. Available for concrete/stud and drywall installations.



Support Bracket
Supports front lip of shelving. Use two shelf support bracket every 36 in. and one at each end. Available in 12 in., 16 in., and 20 in. lengths.




Pre-Loaded Sidewall Bracket
Supports front lip of shelving where it meets a sidewall.
TotalSlide Version: 947 or 948



Pre-Loaded Wall Anchor
Use to affix support bracket to wall.




Standard
Attaches to hang track. Provides adjustable height options for hanging shelving. Space standards no more than 24 in. apart and no more than 4 in. from each end of shelf. Available in 12 in., 30 in., 48 in., 60 in. and 84 in. lengths.




Bracket
Attaches to standard to support shelving. Use a bracket that is the same depth as your shelving. Available in 12 in., 16 in. and 20 in. lengths. (Exception: 16 in. Shelf & Rod installation requires a 12 in. bracket.)




Shoe Shelf Support
Attaches to standard to support shelf at an angle for shoes. Shelf should be installed lip up to keep shoes in place.




Small End Caps
Large End Caps
Use on cut ends of shelving to protect clothing. Available in large (Shelf & Rod) and small (SuperSlide, Close Mesh, and Shelf & Rod) shelving sizes.



Pre-Loaded Down Clip
Attaches to the back of shelving to anchor shelf to wall.




S&R Shelf End Cap
Use on cut ends of Shelf & Rod shelving to protect clothing.



TotalSlide® Shelf Stop
Use on cut ends of TotalSlide shelving to protect clothing.


Optional Hardware



Multi-Purpose Wire Clip
Attaches to the back of shelving to secure shelf to the wall. Use one Clip every 12 in. and one at each end. Use with or instead of wall clips. Use 228 - #8 x 1.25 in. pan head screw for stud installation.




Corner Support
For corner installations. supports front lip of shelving to keep it level where it meets another shelf in the corner.




0.5 in. Square Aluminum or Steel Pole 71 in. & 85 in.
Use in place of support brackets when stacking two or more shelves.



Universal Joiner Plate
Use to join two shelves together to create a continuous run of shelving.



Universal Shelf Support
Attaches to the back of shelving to support shelf at an angle for shoes. Shelf should be installed lip up using wall clips to keep shoes in place.



Pole Clip
Attaches to Pole to support shelving in a center stack.
S&R Version: 977
Linen/SuperSlide Version: 978
TotalSlide Version: 952

Shelving Types



SuperSlide®/Linen

The top-of-the-line, continuous-slide closet solution. Available in 12 in. and 16 in. depths. Use in conjunction with SuperSlide hardware.



TotalSlide®

Our quickest and easiest to install, one-piece, continuous-slide closet solution. Available in 12 in. and 16 in. depths.



Shelf & Rod

The economical closet solution. Available in 10 in., 12 in., and 16 in. depths with your choice of 10 in. or 12 in. hang bar location as measured from the back wall.



Close Mesh

Works best with ShelfTrack for storing small pantry items. Deck wires are 0.63 in. on center vs. 1 in. on center on all other shelving. Available in 6 in., 9 in., 12 in., 16 in. and 20 in. depths.



Linen


The perfect answer to every basic shelving need in every room. Available in depths of 6 in., 9 in., 20 in. and 12 in. double lip.

SuperSlide Hardware




Closet Rod Support

Attaches to SuperSlide shelving to support closet rod. Use one every 36 in. and at each end.




0.75 in. Closet Rod

Snaps into closet rod support to allow hangers to slide without interruption.




Internal Closet Rod Cap

Use on ends of closet rods to keep hangers on rod.



Pre-Loaded Side Wall Bracket

Supports shelf and closet rod at wall.



Corner Closet Rod

Use with SuperSlide shelving to create uninterrupted sliding action around corners. Support with closet rod supports.

Installation and Materials Specifications

Components provide for ClosetMaid shelving installation to drywall without requiring mounting to wall studs.

Shelves are to be attached to walls with ClosetMaid wall clips, end brackets, support brackets and poles. 0.25 in. holes are to be drilled with a sharp drill bit for all wall attachment hardware. **DO NOT PUNCH.**

Wall Clips to hold back of shelf:

Place wall clips #910, #911 every 10 in. to 12 in. apart on level line or use templates #99037 and #9038.

End brackets to support the front of the shelves:

Install on the same level line as the wall clips and center on the front rods of the shelves. All shelves must be front supported a maximum of every 36 in. with an end bracket, support bracket or pole. End brackets #940, #941, #942 (for SuperSlide®). #932, #933 (other shelves).

Drywall:

Drill 0.25 in. hole, insert #910 or #911 wall clip. Use #8 pin to expand anchor.

Wood:

Drill 0.25 in. hole into wood. Secure wall clip with #8 1 in. screw, or secure pole clip #978 directly to wood with #8 1.25 in. screw.

Concrete:

Drill 0.25 in. hole with masonry bit. Insert wall clip #910, secure with #8 1 in. screw.

HangTrack, Standards and Brackets:

Horizontal track mount, level track, secure with screws and/or mollys in studs or drywall. Horizontal track can also be mounted to the top wall/ceiling plate with #12 x 2 in. pan head screw #2876. Secure to at least one stud. Vertical installation of standards no more than 24 in. apart on studs. Attach shelf brackets which can be used with SuperSlide, Heavy Duty,

Linen, Shelf & Rod and Close Mesh 12 in., 16 in., or 20 in. Decking.

Pole:

Use pole clip #978 for linen shelving and clip #977 for Shelf & Rod shelving on pole #2117 or #2118. Pole #2118 recommended for SuperSlide installation.

Shelf Support:

Support brackets #1164, #1166 or #1180 are to be placed vertically to the shelf and attach with #954 or #955 wall anchor. Down clips #981/#978 or cable clip #612 are to be installed with 0.25 in. anchor on the back rod behind every support bracket. For extra capacity the #612 can be attached to vertical studs with the #228 1.25 in. screw. Place every 36 in. maximum, 24 in. minimum for heavy loads.

Corner Support Brackets:

Use on all corner "butt" joints #120.

Wall to Wall Installation:

Use end bracket #932, #933, drill 0.25 in. holes, secure with #8 pin. Or use #914 and secure with a #250 screw. #941, #940, #942 for SuperSlide®

Cutting Shelves:

Shelves are to be cut 0.5 in. to a maximum of 1.38 in. shorter than the actual wall measurements or the desired shelf length.

All exposed cut ends are to be capped with #203 or #204 depending on the shelf.

SuperSlide Component Installation:

Place hang bar supports #925 or #5672 every 24 in. to 36 in. (place support bracket #1164 adjacent to support) use SuperSlide end bracket #979 or #980 at side wall where pole is used. Use 12 in. support brackets for 12 in. or 16 in. depth shelves. Place pole caps #2083 or #2081 on cut end of pole. Use pole connector #2085 to connect two pieces of 0.75 in. hang bar #2012 (white) or #2071 (chrome). When using pole connector, joint must rest in #925 or #5672 bracket. For wall installation, use end bracket #979 or #980. Down clips #978,

#981 or #612 must be used on all open end installations.

TotalSlide Component Installation:

Use side wall bracket #947 or #948; pole clip #952 or #951; and shelf stop #969.

General Specifications:

Furnish and install ClosetMaid Vinyl-Coated, Steel-Rod, Ventilated Shelving and Storage Systems manufactured by ClosetMaid Corp., Ocala, Florida, in all closets.

Wire Shelving Physical Properties:

Materials	Grade c-1006 basic cold drawn steel wire
Tensile strength	Over 100,000 PSI (average)
Cross deck spacing	0.63 in. to 1 in. increments
Coating	Proprietary polyvinyl chloride formula resin (PVC)
Vinyl thickness	9-11 mills (fluidized bed process)
Mounting hardware	Components shall provide for shelving installation to drywall without requiring mounting to concealed wall structural members. Support brackets shall be required for 36 in. span. (24 in. recommended for areas designed for heavy use.)

Coating Specifications

ClosetMaid heavy duty vinyl coating won't chip or split. It is a propriety Polyvinyl Chloride Resin (PVC) with an exclusive mixture of ingredients including plasticizers, stabilizers, pigments and other additives — none of which are listed as hazardous materials on OSHA 29CFR1910.1017.

ClosetMaid's patented plastic components are manufactured to get high performance standards and meet rigid material requirements. Nylon is specified for toughness. Hi-impact styrene is specified for rigid strength. Polypropylene is specified for consistent performance.

Manufacturer reserves the right to change specifications without notice.

For more information visit www.closetmaid.com/builder_architect

CLOSETMAID®

© 2012 ClosetMaid Corporation

650 SW 27th Ave.

Ocala, FL 34471

1-800-874-0008

(Rev. 06/12)



If a ClosetMaid product does not give the user complete satisfaction when installed in accordance with the manufacturer's instructions, it will be exchanged free of charge. Please note that only the unsatisfactory part in a multi-piece product will be exchanged.